
RT80CJ FEATURES

- Compatible with 2-Zone Comfort Controls that use plug&play dampers.
- Power Open/Close or Modulating.
- Uses electronic control of the motor for long life.
- Keyed shaft provides automatic alignment of actuator and damper.
- Shafts with nylon bushings for quiet and reliable operation.
- Plug&Play connection. 25' Cable included.

RT80CJ DAMPER SPECIFICATIONS

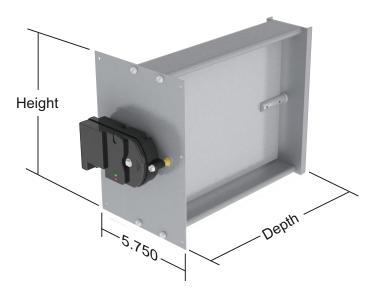

Output Torque 80 in-oz.

Input Control 24VAC applied to OPN or CLS terminal.

Operation Time
Fully opens in approximately 3 seconds. Damper

LED Indicators
Green LED indicates fully open and red LED indicates fully closed.

Damper Type Unsealed.

Electrical Power 24VAC or 24VDC. 2VA when positioning. 1VA when holding position.

Extruded aluminum frame.

Temperature, Operating -20° to 175° F.

Maximum Static Pressure 1.0 inch H₂O.

Available Sizes 8 by 8 inches thru 16 by 20 inches in 2-inch increments

Motor MountingMotor mounted on the 5.750 x Height face.

Ordering Information



Rectangular damper, with A80MJ Plug&Play Actuator. Sealed. Includes 25-foot Plug&Play cable.

		DEPTH						
		8	10	12	14	16	18	20
HEIGHT - ACTUATOR	8	RT80CJ-08x08	RT80CJ-08x10	RT80CJ-08x12	RT80CJ-08x14	RT80CJ-08x16	RT8CJ-08x18	RT80CJ-08x20
	10	RT80CJ-10x08	RT80CJ-10x10	RT80CJ-10x12	RT80CJ-10x14	RT80CJ-10x16	RT80CJ-10x18	RT80CJ-10x20
	12	RT80CJ-12x08	RT80CJ-12x10	RT80CJ-12x12	RT80CJ-12x14	RT80CJ-12x16	RT80CJ-12x18	RT80CJ-12x20
	14	RT80CJ-14x08	RT80CJ-14x10	RT80CJ-14x12	RT80CJ-14x14	RT80CJ-14x16	RT80CJ-14x18	RT80CJ-14x20
	16	RT80CJ-16x08	RT80CJ-16x10	RT80CJ-16x12	RT80CJ-16x14	RT80CJ-16x16	RT80CJ-16x18	RT80CJ-16x20
FACE	18	RT80CJ-18x08	RT80CJ-18x10	RT80CJ-18x12	RT80CJ-18x14	RT80CJ-18x16	RT80CJ-18x18	
111	20	RT80CJ-20x08	RT80CJ-20x10	RT80CJ-20x12	RT80CJ-20x14	RT80CJ-20x16		



5-Year Warranty

All products have a 5-year warranty, limited to the repair or replacement of the product due to defective material or workmanship.

